


## Features

- \* Internal silver printed layers and magnetic shielded structures to minimize crosstalk
- \* Can be used in a wide range of frequency (from dozens of MHz to hundreds of MHz) to suppress EMI
- \* Three types material and wide range of impedance values for various applications

## Applications


- \* Noise suppression for low speed signal of electric equipments such as computers and peripheral devices, DVD cameras, LCD TVs, communication equipments, OA equipments, etc.

## Appearance and Dimensions

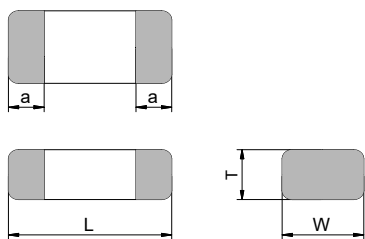


Dimensions(mm)				
Series	L	W	T	a
EGBY201209	2.0+0.3/-0.1	1.25±0.2	0.85±0.2	0.5±0.3

## Land Pattern Dimensions

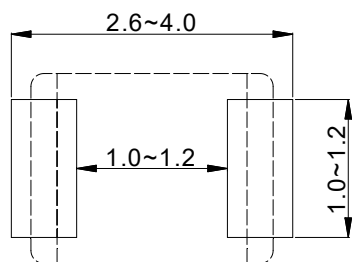

## Circuit Diagram



## Product Identification

EGBY 201209 T - 252 Y - N

① ② ③ ④ ⑤ ⑥

- ① Product Symbol
- ② Dimensions
- ③ Packaging (Tape)
- ④ Impedance Value (252:2500Ω)
- ⑤ Impedance Tolerance (Y:±25%)
- ⑥ Lead Free

### Electrical Characteristics

Part No.	Impedance 100MHz	Tol.	DC Resistance max.	Rated Current max.
Unit	$\Omega$	%	$\Omega$	mA
Symbol	Z	-	R <sub>DC</sub>	I <sub>RMS</sub>
EGBY201209T-070Y-N	7	±25	0.04	2000
EGBY201209T-100Y-N	10	±25	0.04	2200
EGBY201209T-170Y-N	17	±25	0.04	2000
EGBY201209T-190Y-N	19	±25	0.04	2000
EGBY201209T-300Y-N	30	±25	0.05	1500
EGBY201209T-700Y-N	70	±25	0.10	1000
EGBY201209T-800Y-N	80	±25	0.10	1000
EGBY201209T-121Y-N	120	±25	0.15	800
EGBY201209T-181Y-N	180	±25	0.18	700
EGBY201209T-221Y-N	220	±25	0.20	600
EGBY201209T-301Y-N	300	±25	0.20	500
EGBY201209T-421Y-N	420	±25	0.25	500
EGBY201209T-501Y-N	500	±25	0.30	500
EGBY201209T-601Y-N	600	±25	0.30	500
EGBY201209T-751Y-N	750	±25	0.35	500
EGBY201209T-102Y-N	1000	±25	0.35	500
EGBY201209T-152Y-N	1500	±25	0.40	500
EGBY201209T-202Y-N	2000	±25	0.50	500
EGBY201209T-252Y-N	2500	±25	0.70	200

#### Remark:

- ※1: All test data is referenced to 20°C ambient.
- ※2: Rated current: I<sub>SAT</sub> or I<sub>RMS</sub>, whichever is smaller.
- ※3: Saturation Current: max. Value, DC current at which the inductance drops less than 30% from its value without current;  
typ. Value, DC current at which the inductance drops 30% from its value without current.
- ※4: Temperature Rise Current: DC current that causes the temperature rise ( $\Delta T$ ) from 20°C ambient.  
For max. Value,  $\Delta T < 40^\circ\text{C}$ ; for typ. Value,  $\Delta T$  is approximate 40°C.
- ※5: □ specify the inductance tolerance, J:±5%; K:±10%; L:±15%; M:±20%; Y:±25%; N:±30%.
- ※6: Specifications subject to change without notice. Please check our website for latest information.
- ※7: Absolute maximum voltage: DC 25V.
- ※8: The following product series will refer to the above 7 points and will not be separately noted.

苏州隆亿电子科技有限公司
















SUZHOU LONGYI ELECTRONIC TECHNOLOGY CO.,LTD.


TEL: +86 512-66322495



<https://www.lyetec.com>

FAX: +86 512-68055173

E-mail: [sales@lyetec.com](mailto:sales@lyetec.com)

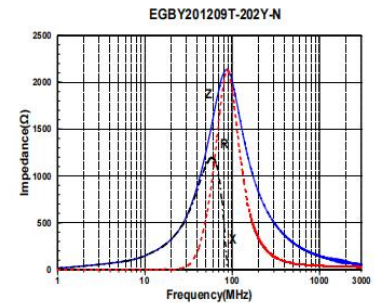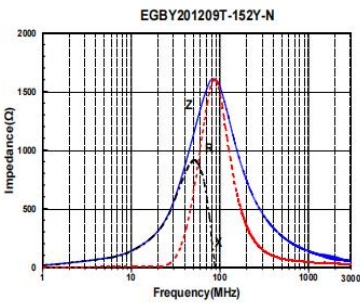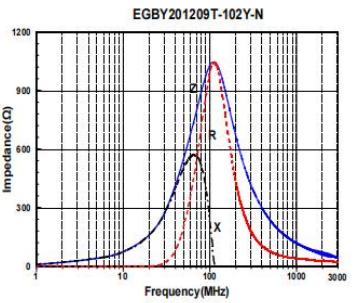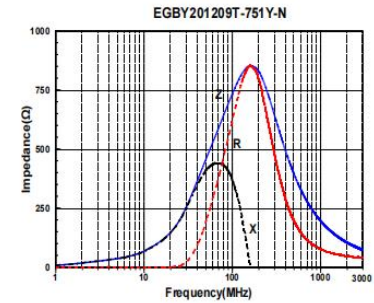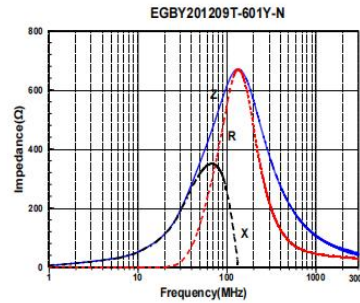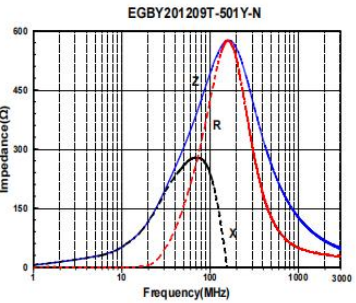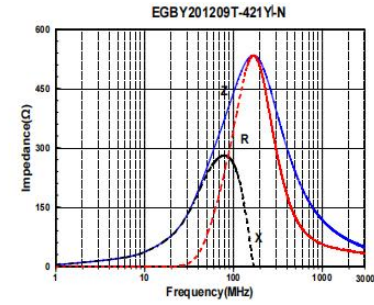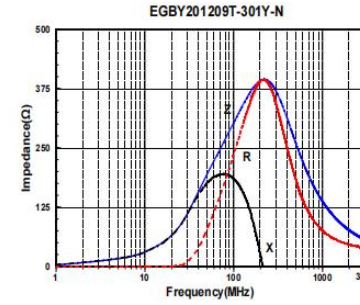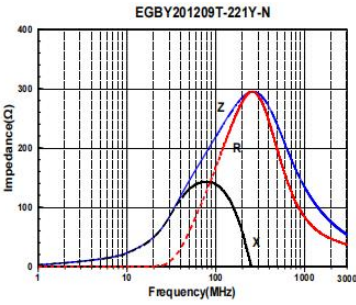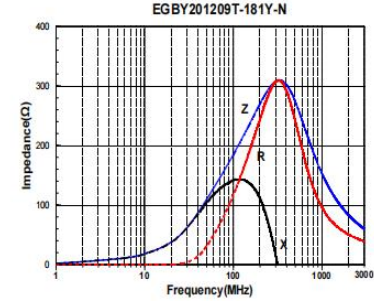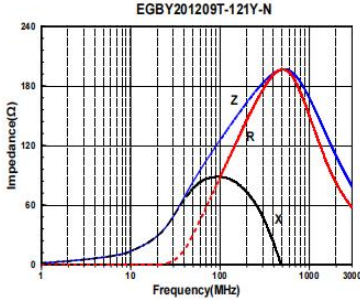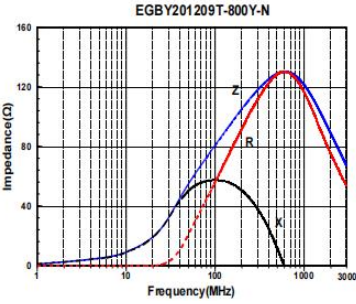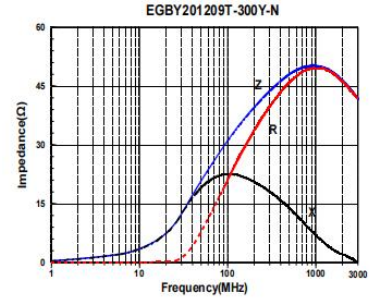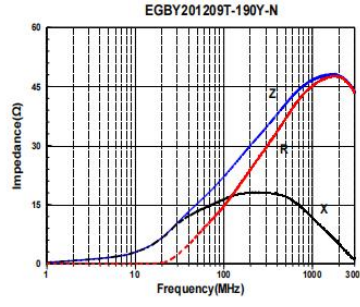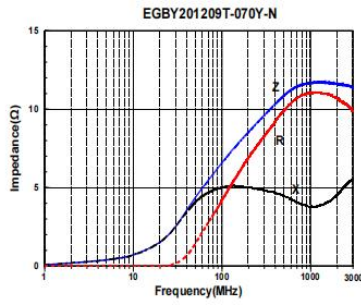


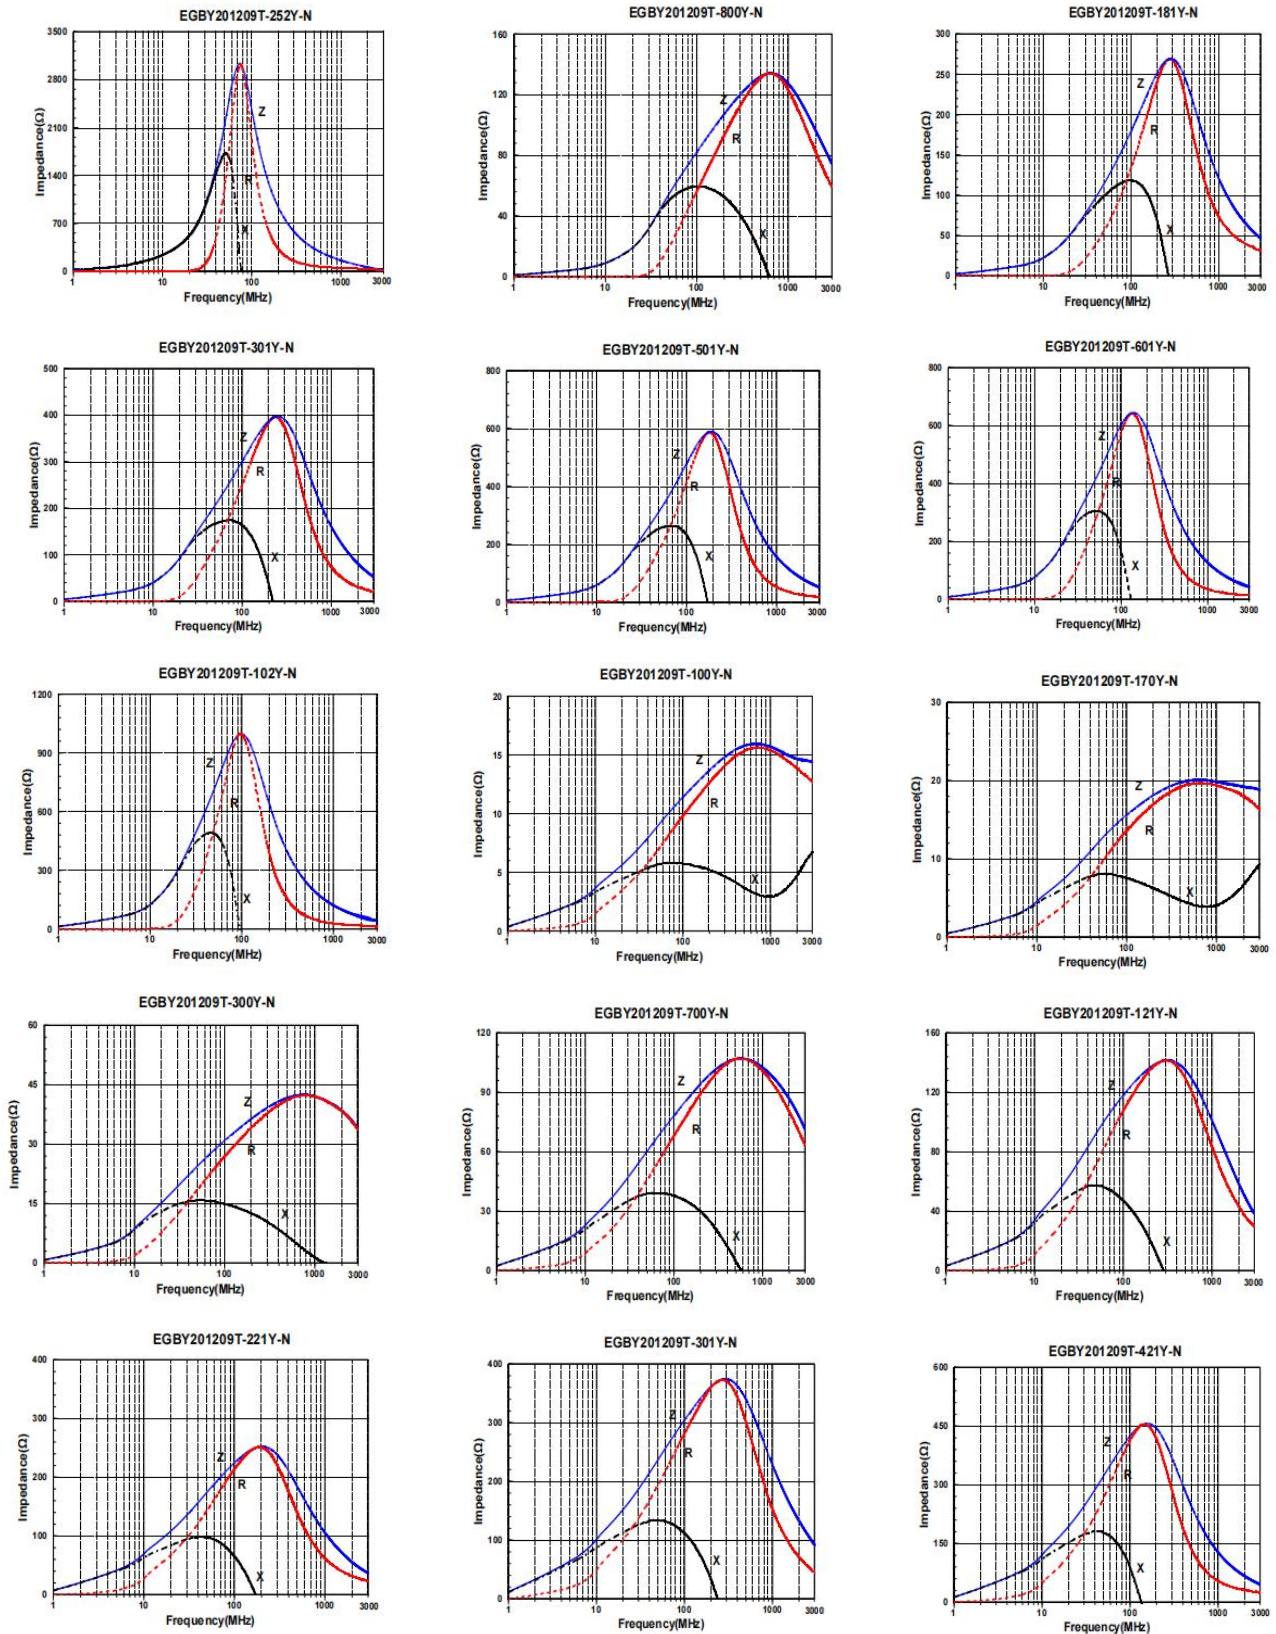

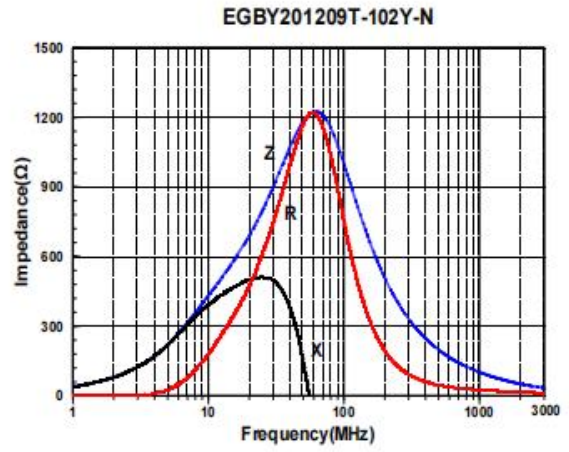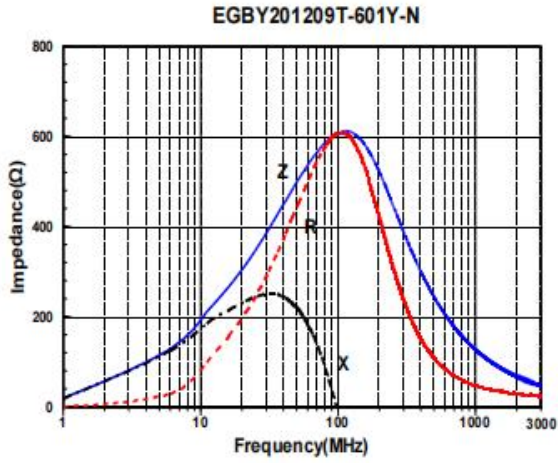


### Packing specification

#### Carrier tape dimensions (mm)

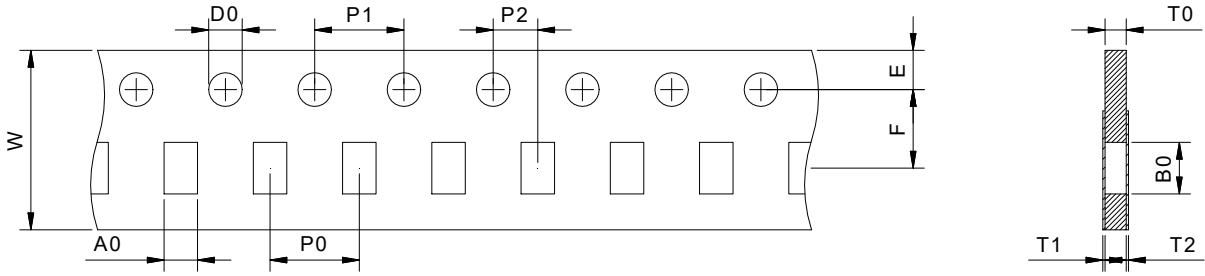


ITEM	W	P0	E	F	T0	T1	T2	A0	B0	D0	P1	P2
Size(mm)	8.0	4.0	1.75	3.50	0.97	0.10	0.10	1.50	2.30	1.50	4.00	2.00
Tolerance	$\pm 0.30$	$\pm 0.10$	$\pm 0.10$	$\pm 0.10$	ref.	max.	max.	typ.	typ.	$\pm 0.10$	$\pm 0.10$	$\pm 0.10$

#### Taping dimensions (mm)

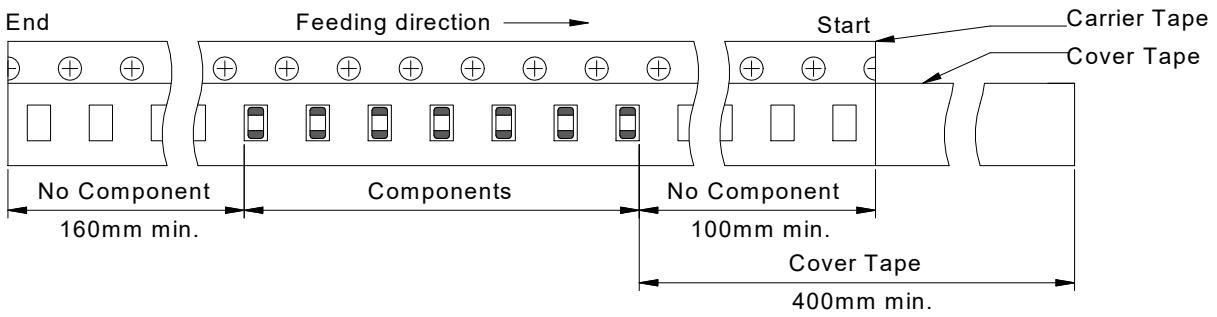


#### Cover Tape Peel Off Condition

Cover tape peel force shall be 10g to 130g.

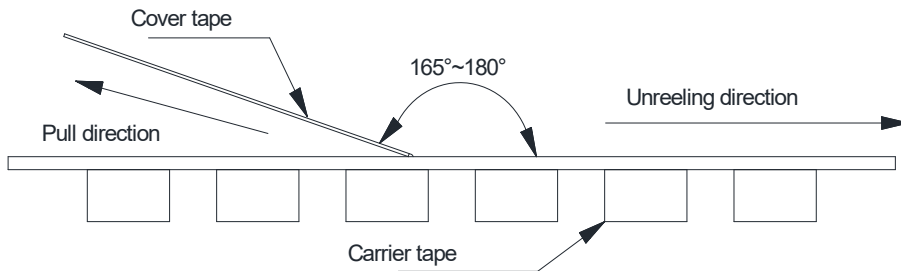


### Reel Dimensions (mm)

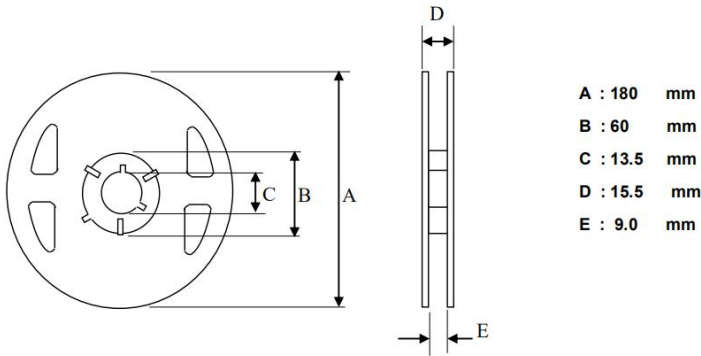

### Packing Quantity

Product Series	Quantity/Reel	Inner Carton Quantity	Outer Carton Quantity
EGBY201209	4000pcs	(4000X6)=24000pcs	(24000X3)=72000pcs

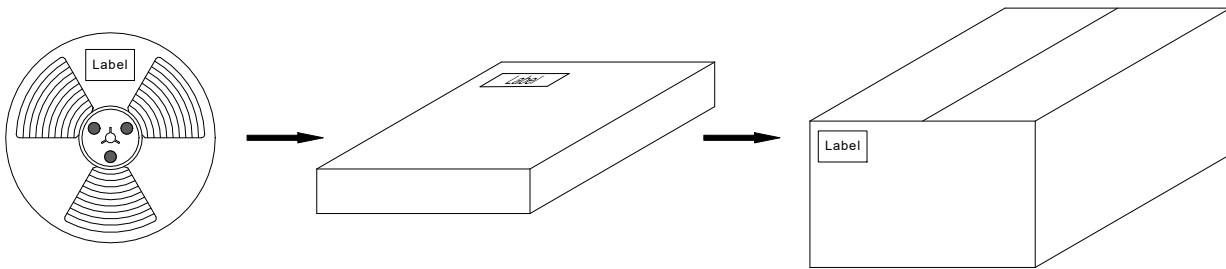

## Recommended Soldering Conditions


Product can be applied to flow and reflow soldering.

### (1) Flux, Solder

- ① Use rosin-based flux. Don't use highly acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).
- ② Use Sn solder.

### (2) Flow soldering conditions


- ① Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150°C max. Cooling into solvent after soldering also should be in such a way that temperature difference is limited to 100°C max. Unwrought pre-heating may cause cracks on the product, resulting in the deterioration of products quality.
- ② Standard soldering profile.

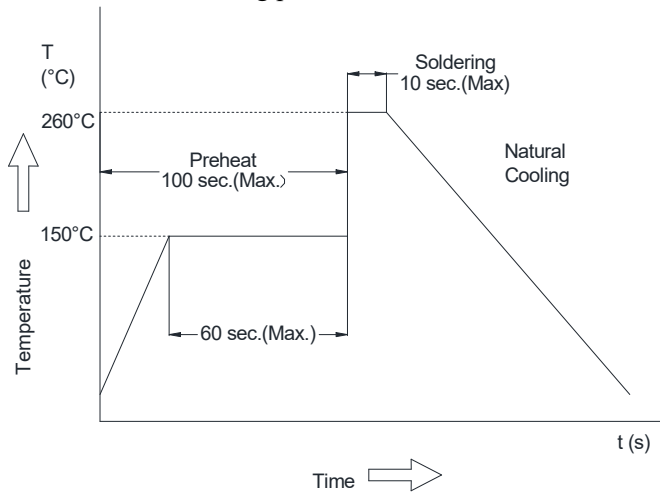

<b>Pre-heating</b>	150°C, 1 minute min
<b>Peak</b>	260°C, 10 seconds max

### (3) Reflow soldering conditions

Classification Reflow Profile for SMT components:

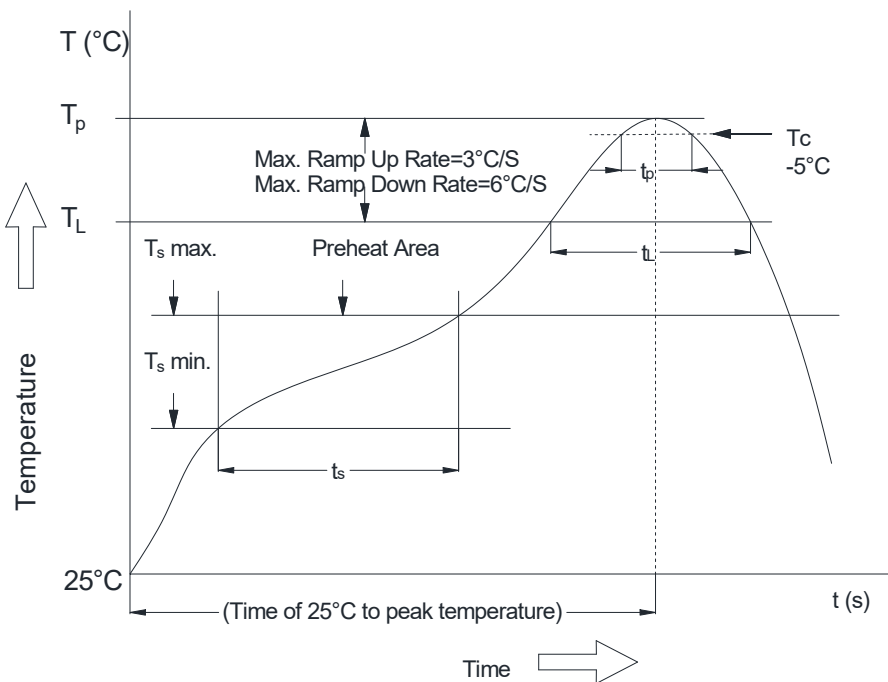

Classification Reflow Soldering Profile:

Profile Feature		Lead-Free Assembly
Average Ramp-Up Rate (Ts max. to Tp)		3°C/second max.
Preheat	- Temperature Min (Ts min.)	150°C
	- Temperature Max (Ts max.)	200°C
	- Time (Ts min to Ts max.)	60-120 seconds
Time maintained above	- Temperature (TL)	217°C
	- Time (tL)	60-150 seconds
Peak/Classification Temperature (Tp)		see table below
Peak/Classification Time (Tp)		3-4 seconds
Time within 5 °C of actual Peak Temperature (tp)		20-30 seconds
Ramp-Down Rate		6°C/second max.
Time 25 °C to Peak Temperature		8 minutes max.

Note 1: All temperatures refer to topside of the package, measured on the package body surface.

2: Refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature:

Properties	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly   Package Thickness < 1.6 mm	260°C	260°C	260°C
PB-Free Assembly   Package Thickness 1.6mm-2.5 mm	260°C	250°C	245°C
PB-Free Assembly   Package Thickness ≥2.5 mm	250°C	245°C	245°C

Refer to IPC/ JEDEC J-STD-020E

(4) The method on Re-work with using the iron:

The following conditions must be strictly followed when using a soldering iron

Pre-heating	150°C, 1 minute
Tip temperature	280°C max
Soldering iron output	20w max
End of soldering iron	φ1mm max
Soldering time	3 seconds max

## Products Storage

(1) Storage period

Products which inspected in LYEC over 12 months ago should be examined and used, which can be confirmed with inspection No. marked on the container. Solderability should be checked if this period is exceeded.

(2) Storage conditions

Products should be storage in the warehouse on the following conditions:

Temperature: Less than 40°C

Humidity : Less than 75% relative and humidity

No rapid change on temperature and humidity

- (3) Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
- (4) Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.
- (5) Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
- (6) Products should be storage under the airtight packaged condition.